

IRON-REMOVE FOR LIQUIDS






DEMOVER 250-400-800-1600 PLUS

TECHNICAL FEATURES

DATA	U.M.	250	400	800	1600
Nominal power of magnets	Gauss	16.000	16.000	16.000	16.000
Power	kW	0,18+0,12	0,18+0,12	0,55+0,18	0,55+0,18
Washing water consumption	l/s	0.10	0.15	0.15	0.20
Weight	kg	270	350	650	1400
Maximum Capacity	l/h	12,000	18,000	36,000	72,000

STRUCTURAL FEATURES

- Automatic programmable cleaning
- Rollers with high-gradient permanent magnets
- All parts in contact with AISI 304 stainless steel
- Gearmotors with life-long lubrication
- AISI 304 stainless steel accident-prevention protections

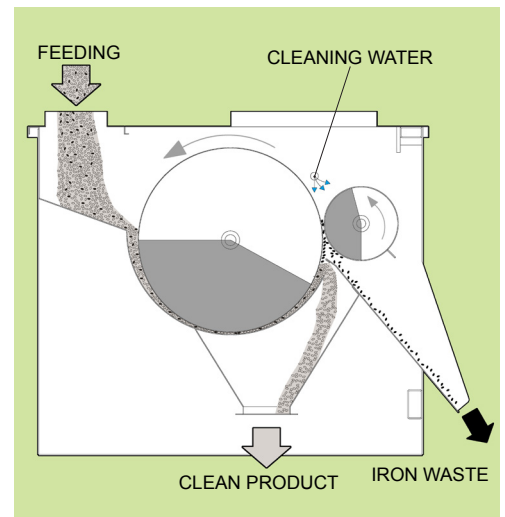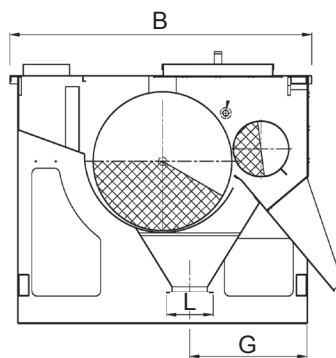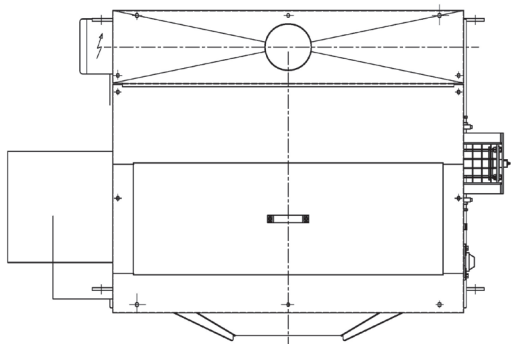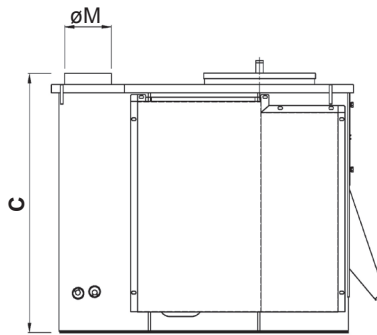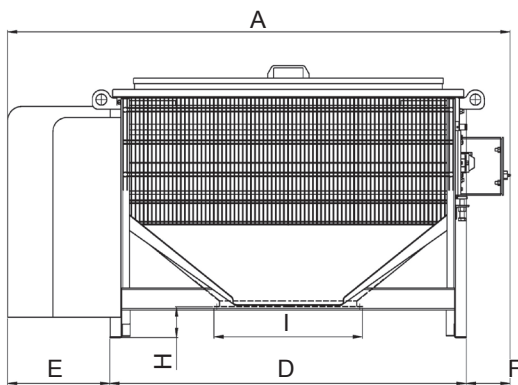

Mod./Size	A	B	C	D	E	F	G	H	I	L	øM
250	1356	793	661	896	310	150	272	12	290	170	170
400	1756	793	661	1296	310	150	272	12	540	170	170
800	1828	1098	942	1296	372	160	426	112	540	170	170
1600	2262	1644	1243	1697	400	165	500	112	940	240	300

USE

- Casting slip deferrization
- Grinding water deferrization

ADVANTAGES

- Constant efficiency, ensured by fully automatic cleaning
- Permanent magnets to ensure operation under any condition
- High capacities with reduced overall dimensions

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.



9LDR8DVLRRL0
 61721126516
 WDO
 7HO
 EURWHFBLPDLORLEURWHFBL

217751

ZpO
 WDPLEUDW
 FRWDFWDPLEUDW