

MILL DISCHARGE TRAILER-MOUNTED UNIT




TSC 800 - 900 - 1200

TECHNICAL FEATURES

DATA	U.M.	800	900	1200
Number screening nets	no.	1		
Screening surface	m ²	0.36	0.587	0.932
Power	kW	0.48	0.73	1.25
Centrifugal force	N	6670	10300	12753
Centrifugal electric pump	kW	2.2		
Pump max operating pressure	Bar	0,5		
Max operating temperature	°C	80		
Weight	kg	130	160	200

STRUCTURAL FEATURES

- AISI 304 stainless steel chassis
- Parts in contact with product: AISI 304 stainless steel roughness $\leq 0.5 \text{ Ra}_{\mu}$
- Protection rating: IP65
- Metal separator with permanent magnets
- Centrifugal electric pump to convey enamel

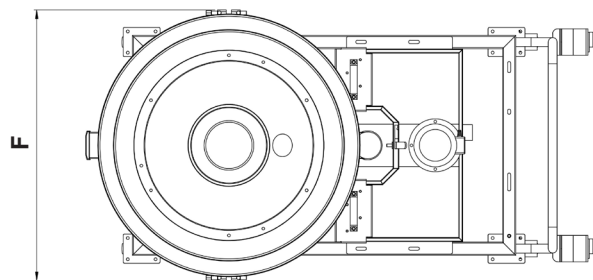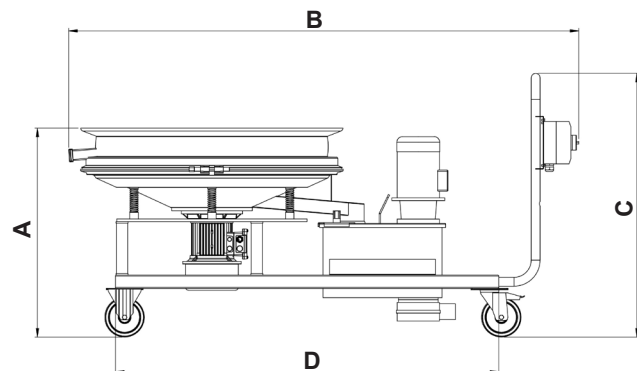

Mod./Size	A	B	C	D	E	F
TSC 800	810	1790	996	1450	830	842
TSC 900	789	1930	996	1450	830	1022
TSC 1200	855	2038	996	1450	830	1242

USE

- Screening of enamels in mill discharge outlet

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.