

MILL DISCHARGE TRAILER-MOUNTED UNIT




TSC 800 - 900 - 1200

TECHNICAL FEATURES

| DATA | U.M. | 800 | 900 | 1200 |
|-----------------------------|----------------|------|-------|-------|
| Number screening nets | no. | 1 | | |
| Screening surface | m ² | 0.36 | 0.587 | 0.932 |
| Power | kW | 0.48 | 0.73 | 1.25 |
| Centrifugal force | N | 6670 | 10300 | 12753 |
| Centrifugal electric pump | kW | 2.2 | | |
| Pump max operating pressure | Bar | 0,5 | | |
| Max operating temperature | °C | 80 | | |
| Weight | kg | 130 | 160 | 200 |

STRUCTURAL FEATURES

- AISI 304 stainless steel chassis
- Parts in contact with product: AISI 304 stainless steel roughness $\leq 0.5 \text{ Ra}_{\mu}$
- Protection rating: IP65
- Metal separator with permanent magnets
- Centrifugal electric pump to convey enamel

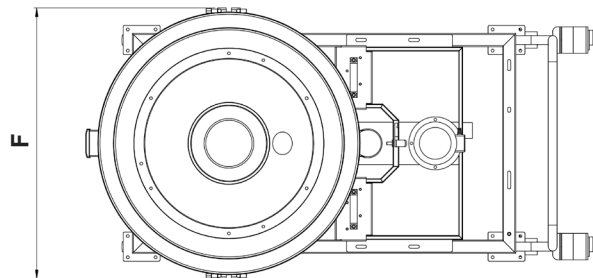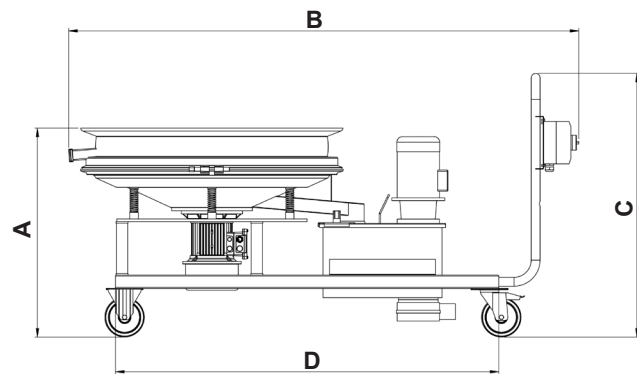

| Mod./Size | A | B | C | D | E | F |
|-----------------|-----|------|-----|-------------|-----|------|
| TSC 800 | 810 | 1790 | 996 | 1450 | 830 | 842 |
| TSC 900 | 789 | 1930 | 996 | 1450 | 830 | 1022 |
| TSC 1200 | 855 | 2038 | 996 | 1450 | 830 | 1242 |

USE

- Screening of enamels in mill discharge outlet

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.